

# M-DRIVER-30-CV-3WY

## LIGHTING DRIVER SOLUTIONS FOR METRO 3-WAY OUTLETS

Metro ELV Constant Voltage\*, Class 2, Dimmable LED Drivers (30W, 24/12 V DC).  
 Fireproof, Environmentally friendly PC cover. Short Circuit and overload protected.  
 Integral wiring compartment.

\* Constant Current Versions are available, not shown.


### Features:

|                       |                       |
|-----------------------|-----------------------|
| <b>Input Voltage</b>  | 100-277 VAC           |
| <b>Output Voltage</b> | 12/24 V DC            |
| <b>Output Power</b>   | 30W                   |
| <b>AC Frequency</b>   | 50-60 Hz              |
| <b>Power Factor</b>   | >.95                  |
| <b>Operating Temp</b> | -30°C - 45°C          |
| <b>Efficiency</b>     | >85%                  |
| <b>Weight</b>         | 7.05oz. (0.2Kg)       |
| <b>Lifetime</b>       | >50,000 hrs. @ Tc Max |
| <b>Length</b>         | 10.24" (260mm)        |
| <b>Width</b>          | 1.18" (30mm)          |
| <b>Height</b>         | 0.73" (18.5mm)        |

- FIREPROOF, ENVIRONMENTALLY FRIENDLY PC COVER
- CLASS 2
- UL LISTED
- SHORT CIRCUIT AND OVERLOAD PROTECTED
- INTEGRAL WIRING COMPARTMENT

## M-DRIVER-30-CV-3WY

**120 V AC  
WIRING  
COMPARTMENT**

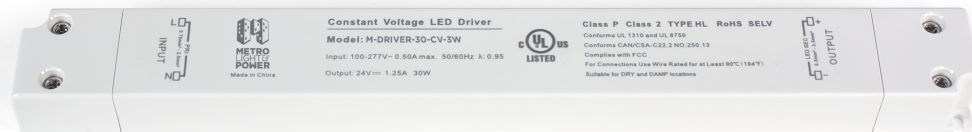

**24 V DC  
WIRING  
COMPARTMENT**